REMOTE DEMOLITION ROBOTS



HUSQVARNA DXR 95 9.8 kW, 589 kg, reach 3.2/2.7 m up/forward

TEAM MATES THAT GIVE YOU MORE THAN POWER


As an expert on controlled demolition, you know exactly how to get the job done - and our solutions let you do it smarter, with better perfomance and new levels of power. Explore what you can accomplish with the DXR demolition robots from Husqvarna. Get ready to experience unstoppable power and meticulous control like you've never done before.



HUSQVARNA DXR 315 27 kW, 2020 kg, reach 5.5/5.2 m up/forward



HUSQVARNA DXR 305 27 kW, 1960 kg, reach 5.2/4.9 m up/forward



HUSQVARNA DXR 275 24 kW, 1750 kg, reach 4.8/4.5 m up/forward



HUSQVARNA DXR 145 18.5 kW, 985 kg, reach 4.4/3.7 m up/forward

TOOLS FOR DEMOLITION ROBOTS



HUSQVARNA DCR 500, DCR 100 AND DCR 90

With these powerful crushers you can easily crush a 270-465 mm thick concrete wall, staircases,



HUSOVARNA BUCKETS

Available for all Husqvarna demolition robots in three sizes. Standard, wide and narrow.



HUSQVARNA ER 50 AND ER 40

Highly productive rotary drum cutters for trenching, surface removal and profiling in rock, concrete and hard soil.

HUSOVARNA

gripping volume.

MG 200 AND MG 100

Multi grapples that offer low

operating weight with high





LONG WORKING TOOLS Enables longer range and increased distance between the DXR and



HUSQVARNA DSS 200 Steel shearer for demolition of structures, piping, process vessels and tanks. Ideal in sensitive areas such as process industries For Husqvarna DXR 315, DXR 305, DXR 275

ACCESSORIES FOR DEMOLITION ROBOTS





STEEL TRACKS Enables work in hot applications, as well as where sharp objects are present. For Husqvarna DXR 315, DXR 305, DXR 275 and DXR 145.



DUST SUCTION COVER KIT A cover and hose kit for the ER 50 drum cutter to enhance work environment by reducing airborne dust, and smaller particles. The dust section cover is placed around the cutting heads. Can be retrofitted to the ER 50 drum cutter.



Enables work continuously with full power in high ambient temperatures.

HEARING PROTECTION WITH HEADBAND

Comfortable and lightweight with a flexible padded headband. Design allows for 20 % adjustment of pressure. Approved according





HEARING PROTECTION WITH FM RADIO

Good sound quality and comfortable fit. Equipped with 3.5 mm audio input (AUX) for music player and communication radio. Versions available with headband or helmet mount.



PROTECTIVE GLASSES, CLEAR X

Protective glasses with non-scratch, clear lenses, extendable frames and lenses that can be angled. Approved as per EN 166 and Ansi Z87+.



GLOVES, CLASSIC

A one-size durable glove made with a goat leather palm with spandex fabric on the back. Rubberised cuff with cotton binding for a perfect fit around the wrist.



FUEL CAN

Our range of accessories also includes our in-house developed petrol can, which holds 61 and is fitted with an effective level control.



HUSQVARNA SMARTGUARD™

Sturdy and comfortable protective jacket

made with reinforced material aiming to

and chest. High visibility according to

EN20471 class 2. Removable sleeves.

increase protection of the operator's neck

smart pockets and ventilation. Size S-XXL

JACKET PE 10 J

HUSQVARNA SMARTGUARD™ HELMET PE 10 H

Sturdy, yet lightweight with a special chin guard aiming to increase protection of the operator's face. Complete with visor and hearing protection, with room for antidust mask and personal eye protection.



Husqvarna


www.husqvarnaconstruction.com




PRODUCT RANGE 2024 HUSQVARNA CONSTRUCTION





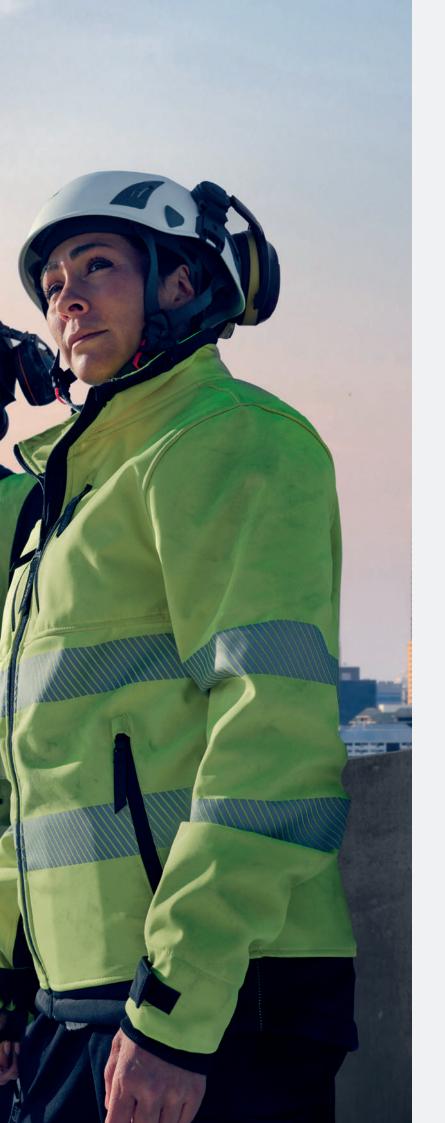



A WIDE RANGE OF SERVICES TO SUPPORT YOUR BUSINESS


Husqvarna services are developed to support the daily operations for you and your staff working in the construction business. Depending on where you work – at a construction jobsite, in an office or in a workshop – we offer a specific solution tailored for you. Our services cover a wide scope, from financing, fleet management, extended warranties and service contracts to training and assistance for users and workshops.

HUSQVARNA MAINTENANCE CONTRACT

The best way to prevent operational issues is to have your equipment checked regularly by someone who has the proper knowledge, parts and tools. Following your equipment's maintenance plan, you can detect potential errors and choose to replace worn parts before they cause problems. Additionally, you know exactly what your maintenance needs will cost you over the contract's duration.

HUSQVARNA REPAIR AND MAINTENANCE CONTRACT

Repairs and maintenance are natural parts of any operation. But scheduling and keeping track of service times can be time consuming and often result in unwanted costs, as well as unplanned downtime. With a Husqvarna Repair and Maintenance Contract you will safeguard your operation and your machine availability, thus leaving you free to focus on your core business – getting the job done.

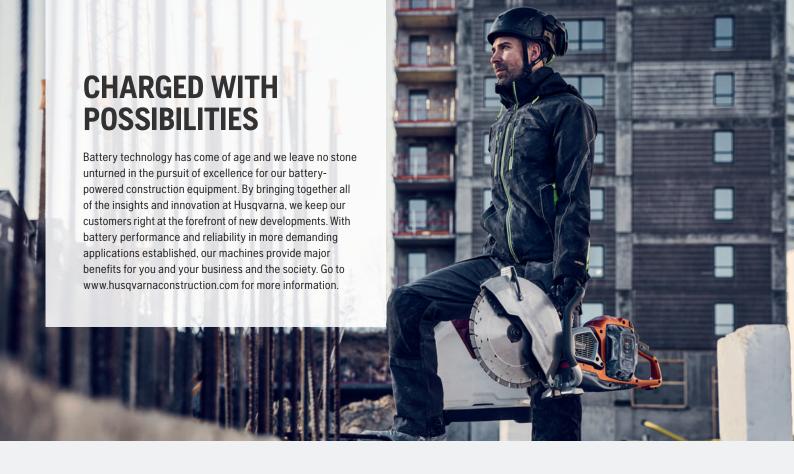

HUSQVARNA PACE™ BATTERY SYSTEM

So much more becomes possible with the high power delivered by the PACE™ system of 94V battery-powered products. The battery is available in two sizes and delivers high performance for demanding professionals on the go. Machines using this growing system are setting high standards for the industry. Husqvarna K1PACE is recognised by a Red Dot design award for user-friendy design, a PITA Tool Innovation Award and a nomination for a World Demolition Award for innovation.



HUSOVARNA K 1 PACE 7.2/7.4kg, blade size 300/350 mm, cutting depth 121/144.5 mm.



HUSQVARNA K 1 PACE RESCUE 7.9 kg, blade size 350 mm, cutting depth 144.5 mm.



DRILL MOTOR
HUSQVARNA DM 1 PACE 2.5 kW. recommended drill diameter 25-400 mm, 17.3 kg (incl. battery).



DUST EXTRACTOR **HUSQVARNA DE 120 H PACE** High safety standards. Easy to transport. Operate more sustainably with e-flow 480 m³/s, 41 kg.

NEW

ACCESSORIES PACE™



375/750 Wh, weight 3/5 kg



HUSOVARNA C900X/C1800X High power battery chargers with a fast charging mode and active cooling. Power 900 W/1800 W



K 1 PACE VAC ATTACHMENT Ideal dust collection enables you to cut without water



A sturdy, durable wooden box for convenient protection and transportation of two PACE batteries and one charger. UN 3480 certified for transportation of lithium-ion batteries

DIAMOND BLADES PACE™



HUSQVARNA TACTI-CUT S 35 S PACE Providing a good balance between performance and price in all cutting operation. Low vibrations with the continuous rim and silence core



S HUSQVARNA ABRASIVE DISCS Conventional abrasive disc specially recommended to cut metal and rebars possible to use in standard PC.



S HUSQVARNA VARI-CUT FR3 Has one layer of vacuum brazed diamond for fast cutting of a large variety of materials like tiles, stone, rebars, fiber board, PVC pipes and more. Possible to use in standard PC

HUSQVARNA BLI BATTERY SYSTEM

Power meets versatility with our BLi system of 36V battery-powered products. Lightweight and powerful, the system is versatile for a variety of construction applications and is compatible with a wide range of Husqvarna tools for forestry and landscaping. The tools have been optimised to provide higher performance and better utilisation of battery power.







HUSQVARNA DM 540i 1350 W. recommended drill diameter 0.15–75 mm (100 mm with drill stand), 4.9 kg.



HUSOVARNA K 540i $4.17\,\mathrm{kg},$ blade size 267 mm, cutting depth 100 mm.



BATTERY SCREED **HUSQVARNA BV 30i** Output power 0.8 kW, weight 11.5 kg



HUSOVARNA K 535i 3.5 kg, blade size 230 mm, cu depth 76 mm



HUSQVARNA DE 110i H Versatile and compact H-class dust extractor. $215\,\text{m}^3/\text{s},\,26\,\text{kg}.$



ACCESSORIES BLi

block paving kit

available.



HUSQVARNA QC330/QC500

Quick charging unit with 2-LED status indicator and active battery cooling for minimum charge time and longer battery life.



HUSQVARNA BLi 200/300

Sturdy construction and excellent cooling. Rechargeable more than 1.500 times. 5/8.9 Ah, 1.3/1.9 kg.



K 540i AND K 535i VAC ATTACHMENTS Ideal dust collection enables you to cut without



HUSOVARNA WT 15i

Compact and easy-to-use water tank with electric pump. Has a capacity of 15 litres and allows for continual cutting for 45 minutes. Battery-powered, 36 V BLi system

WORKING LIGHT HUSQVARNA WL 8i

Extremely durable and powerful – up to 8000 lumen. Easy to carry and position, change from flood light to 360 degree area light using the light diffuser accessory. Built-in power bank with USB outlet. Tripod accessory gives an adjustable height between 1.35 and 3 m. Max run time 48 hours (with BLi 300), 3.5 kg.



HUSQVARNA BATTERY BOX PLYWOOD

A sturdy, durable wooden box for convenient protection and transportation of two BLi batteries and one charger. UN 3480 certified for transportation of lithium-ion batteries.



DIAMOND TOOLS BLi



G HUSOVARNA FLITE-CUT S 35 S BAT

Developed for smooth and fast cutting in diverse materials such as concrete, bricks, blocks and natural stone. With this blade you will experience a reduced side friction, lower vibrations, and a better slurry evacuation




B HUSOVARNA TACTI-CUT S 35 S BAT

Optimised for cutting in materials such as concrete bricks, blocks and natural stone. Thanks to the segment shape and composition, you get easier and more free cutting blades, which results in reduced vibration levels and an easy-going cutting feeling.



S HUSOVARNA VARI-DISC STEEL

Conventional abrasive disc specially recommended to cut metal and rebars



S HUSQVARNA VARI-CUT FR3

Has one layer of vacuum brazed diamond for fast cutting of a large variety of materials like tiles. stone, rebars, fibre board, PVC pipes and more.



G HUSQVARNA ELITE-DRILL D 10 TW

For handheld, brick, light reinforced concrete applications. Wet drilling.



G HUSQVARNA ELITE-DRILL D 1610

Developed and optimized for DM 1 PACE. For lower power ratings 2.5-3kW.





G HUSQVARNA ELITE-DRILL D 65 DRY

Main drill bit for K 540i. Allows drilling in sensitive environments or when water is not accessible.

OTHER BATTERY PRODUCTS

The range of battery-powered products from Husqvarna is constantly expanding to maximise the benefits and take more of the strain out of your daily work.



HUSQVARNA LFe 60 LAT

1.8 kW, 350 mm, 88 kg. Runs on Honda eGX battery platform, specifically developed for compaction applications.



HANDHELD GRINDER

HUSQVARNA HG 125 B

1500 W equivalent, grinding width 125 mm, disc speed 11000 rpm, 2.2 Kg (excl. battery). Compatible with all new and existing Bosch Professional 18V tools and chargers.



CONCRETE CORE DRILLS, DRILL MOTORS WITH STANDS AND DRILL STANDS



HUSQVARNA DM 540i

1350 W, recommended drill diameter 0.15-75 mm (100 mm with drill stand), 4.9 kg. BLi 36V battery system.



HUSQVARNA DM 1 PACE

2.5 kW, recommended drill diameter 25-400 mm, 17.3 kg (incl. battery).



HUSQVARNA DM 700

6000/3000 W. 3-phase/1-phase. recommended drill diameter 80-600 mm,



ELECTRIC-POWERED **HUSQVARNA DM 430**

3200 W, 1-phase, recommended drill diameter 100-450mm. 15.5kg.



HUSOVARNA DM 400

3200 W, 1-phase, recommended drill diameter 55-350 mm. 14 kg.



ELECTRIC-POWERED
HUSQVARNA DM 370

3200 W, 1-phase, recommended drill diameter 25-250 mm, 14 kg.



HUSOVARNA DM 406 H

120/230/340/580/980/1400 rpm recommended drill diameter 0-650 mm, 16 kg.





HUSQVARNA DM 220

1850 W, 1-phase, recommended drill diameter 150 mm, handheld 80 mm, 7.5 kg.



2000 W, 1-phase, recommended drill diameter 25-100 mm. 6.4 kg.



DIAMOND CORE DRILL BITS

HUSOVARNA DMS 160 AT

1550 W, 1 phase max Ø 120 mm, 10.5 kg.





DS 900

Ø 900 mm travel length 950 mm, 24 kg.



HUSQVARNA DS 500 Ø 500mm, travel

length 706 mm. 18 kg.



G S HUSQVARNA ELITE-DRILL TW AND VARI-DRILL TW SERIES

ELITE-DRILL TW series is specially designed for battery-powered and low-powered handheld drill motors. Experience a faster and smoother drilling operation with quick and precise start. ELITE-DRILL TW is a range of thin walled drill bits for wet drilling. 1/2" gas connector.



G HUSQVARNA ELITE-DRILL D1600 SERIES

Gold level drill bits delivering smooth, fast drilling in demanding applications. Available for various materials like heavily reinforced concrete, hard aggregate and abrasives. Diameters 92-350 mm.



HUSQVARNA DS 150

Ø 150 mm, travel length 495 mm, 15.5 kg.



S HUSQVARNA VARI-DRILL

the application. 1 1/4"



B HUSQVARNA TACTI-DRILL

Bronze level drill bits with a good price/ performance value for non intensive use in heavier applications. Diameters from 52-300 mm. 1 1/4" connector.





Ø 250 mm, travel length

685 mm, 16 kg.

HUSOVARNA DS 50 COMBI

Ø 300 mm, travel length 1090 mm, 21 kg.



HUSQVARNA DS 50 GYRO

Ø 350 mm, travel length 670 mm, 56 kg.



HUSQVARNA

DS 40 GYRO Ø 150 mm, travel length 600 mm, 30 kg.



Silver level drill bits with

great performance and durability in heavy duty applications. Diameters from $18-300\,\text{mm}$ in two versions depending on

S HUSQVARNA **VARI-DRILL DRY**

Lightweight drill bits for dry indoor drilling by specialist professionals. Two versions available. Vacuum-brazed segments for drilling tiles and natural stone. Diameters 5-85 mm. Laser welded segments for drilling concrete, bricks, and cement blocks. Diameters 37-200 mm.

POWER CUTTERS



BATTERY-POWERED HUSQVARNA K 1 PACE

7.2/7.4kg, blade size 300/350 mm, cutting depth 121/145 mm. PACE 94V battery system



BATTERY-POWERE **HUSQVARNA K1 PACE RESCUE**

7.9 kg, blade size 350 mm, cutting depth 145 mm. PACE 94V battery system.



HUSQVARNA K1 PACE RAIL

7.9 kg, blade size 356 mm, cutting depth 133 mm. PACE 94V battery system



HUSQVARNA K 535i

3.5 kg, blade size 230 mm, cutting depth 76 mm. BLi 36V battery system.



HUSOVARNA K 540i

 $4.17\,\mathrm{kg}$, blade size $267\,\mathrm{mm}$, cutting depth



HUSQVARNA K 1270

119 cc. 5.8kW. 13.3/13.7kg, blade size 350/400 mm, cutting depth 118/145 mm.



PETROL-POWERED
HUSQVARNA K 1270 SMARTGUARD

 $119 \, \mathrm{cc}, 5.8 \, \mathrm{kW}, \, 15.1 \, \mathrm{kg}, \, \mathrm{blade \, size} \, 400 \, \mathrm{mm},$ cutting depth 118/145 mm.



PETROL-POWERED HUSQVARNA K 970

94 cc, 4.8 kW, 11/11.6 kg, blade size 350/400 mm, cutting depth 125/155 mm.



PETROL-POWERED

HUSQVARNA K 970 SMARTGUARD

94 cc, 4.8 kW, 11.9/12.8 kg, blade size 350 /400 mm, cutting depth 125 /155 mm.



PETROL-POWERED

HUSQVARNA K770 / K 770 WITH OILGUARD

74 cc, 3.7 kW, 10/10.1 kg, blade size 300/350 mm, cutting depth 100/125 mm.



PETROL-POWERED

HUSQVARNA K 770 SMARTGUARD

74 cc, 3.7 kW, 10.8/11.1 kg, blade size $300/350\,\text{mm}$, cutting depth $100/125\,\text{mm}$



PETROL-POWERED

HUSQVARNA K770 VAC

74 cc, 3.7 kW, 11.0 kg, blade size 305 mm, cutting depth 123 mm.



PETROI-POWERED

HUSQVARNA K 770 DRY CUT

74 cc, 3.7 kW, 12.0 kg, blade size 305 mm, cutting depth 123mm.



PETROL-POWERED

HUSQVARNA K 970 RING

94 cc, 4.8 kW, 13.8 kg, blade size 370 mm, cutting depth 270 mm.



PETROL-POWERED

HUSQVARNA K 760 CUT-N-BREAK

74 cc, 3.7 kW, 11.1 kg, blade size 230 mm, cutting depth 400 mm.



PETROI-POWERED

HUSQVARNA K 970 CHAIN

94 cc, 4.8 kW, 9.7 kg, bar size 350 mm, cutting



PETROL-POWERED

HUSQVARNA K 1270 RAIL

119 cc, 5.8 kW, 20.5/21.2 kg (incl. RA10), blade size 350/400 mm, cutting depth 118/145 mm.



PETROL-POWERED

HUSQVARNA K 970 RESCUE

 $94\,cc,\,4.8\,kW,\,11\,kg,\,blade\,size\,350\,mm,\,cutting$ depth 125 mm



PETROL-POWERED

HUSQVARNA K 770 RESCUE

 $74\ cc,\,3.7\ kW,\,9.6\,kg,\,blade$ size $300\ mm,\,cutting$ depth 100 mm.



HYDRAULIC-POWERED

HUSQVARNA K 3600 MK II

150 bar/40 l min, 4.3 kW, 8.3 kg, blade size 370 mm, cutting depth 270 mm.



HYDRAULIC-POWERED

HUSQVARNA K 2500

 $150 \, \text{bar}/40 \, \text{I/min}, 5.2 \, \text{kW}, 8.3 \, \text{kg}, \, \text{blade size}$ 400 mm, cutting depth 145 mm



HUSQVARNA K 40

7 kp/cm², 3.2 kW, 9.9 kg, blade size 350 mm, cutting depth 125 mm.



ELECTRIC-POWERED HUSOVARNA K 7000

230/400 V, 5.5 kW (3-phase)/3 kW (1-phase), 9.8 kg, blade size 400 mm, cutting depth 155 mm.



HUSOVARNA K 7000 SMARTGUARD

230 /400 V, 5.8 kW (3-phase) /3 kW (1-phase), 5.1kg, blade size 400mm, cutting depth 145 mm.



PETROL-POWERED HUSQVARNA K 7000 RING

230/400 V, 5.5 kW (3-phase)/3 kW (1-phase), 13.1/12.4 kg, blade size 350/425 mm, cutting depth 270/325 mm.



ELECTRIC-POWERED
HUSOVARNA K 7000 CHAIN

230/400 V, 5.5 kW (3-phase)/3 kW (1-phase), 9.1 kg, bar size 450 mm, cutting depth 450 mm.



HUSQVARNA K 4000

230/120/110 V, 2700/1800/2200 W, 8.5 kg (incl. Vac attachment 1 kg), blade size 350 mm, max. cutting depth 125 mm.



HUSQVARNA K 4000 CUT-N-BREAK

230/120/110 V, 2700/1800/2200 W, 8.9 kg, blade size 230 mm, cutting depth 400 mm.

DIAMOND TOOLS FOR POWER CUTTERS



G HUSOVARNA ELITE-CUT

Gold level blades with Exo-Grit segments for smooth, efficient cut also in reinforced concrete.

Diameters 300 – 400 mm in several versions optimised for the material



S HUSQVARNA VARI-CUT

Silver level blades tailored for demanding professionals working on a variety of quick jobs. The new increased segment height provides higher speed and extended blade life. Diameters 300 - 400 mm in several versions optimised for each material to cut.



B HUSQVARNA TACTI-CUT

Bronze level blades optimised for less intensive professional cutting in most materials. Diameters 300-400 mm in several versions optimised for each material to cut



G HUSQVARNA ELITE-CUT S35 SBAT

Providing a maximum cutting speed and wear resistance in all heavy cutting job.



B HUSQVARNA TACTI-CUT S35 SBAT

Providing a good balance between performance and price in all cutting operation.



B HUSQVARNA TACTI-CUT S 35 S PACE™

Providing a good balance between performance and price in all cutting operation.



S HUSQVARNA RESCUE BLADES

Blades with brazed diamond technology, for all-round free cutting in materials as concrete, rubber, brick, metal, steel etc. Suitable for rescue applications. Diameters 300-400 mm.



G S HUSOVARNA

Top-grade abrasive discs that can



ABRASIVE DISCS

cut practically any material, such as stone, steel and railway rail. Diameters 300-400 mm



G HUSOVARNA CUT-N-RREAK RI ADE

For the K760/K4000 Cut-n-Break. Gold level blades with segment shape that produces excellent cutting characteristics and performance. Available in three hardness levels.



G HUSQVARNA ELITE-RING

Gold level ring saw blades designed for optimal cutting speed, even in the hardest reinforced concrete. Three hardness levels. Available in Pre-Cut version with 6.0 mm wide segments. Diameter 370 And 425 mm.



S HUSQVARNA VARI-RING

Silver level ring saw blades available in three hardness levels. Diameter 370 mm and 425 mm



Water tank 13.3 I

CUTTING TROLLEYS

HUSOVARNA KV 9/12

G HUSOVARNA ELITE-CHAIN 450 MM/18"

A range of professional, premium and quality chains for sawing in reinforced concrete and other construction materials.



S HUSQVARNA VARI-CHAIN 450 MM/18"

Ideal for demanding professionals, this is a chain that delivers high cutting speed in various allround construction applications.



G HUSQVARNA ELITE-GUIDE BAR 450MM/18

Guide bars developed to be the optimal choice of cutting equipment for any Husqvarna concrete chainsaw. Fits on both new and older models of Husqvarna concrete chainsaws.

ACCESSORIES FOR POWER CUTTERS



HUSOVARNA WT 15i

Compact and easy-to-use water tank with electric pump. Has a capacity of 15 litres and allows for continual cutting for 45 minutes. Battery-powered, 36 V BLi system



EQUIPPED FOR THE JOB

SmartGuard™ is a line of innovative protective equipment, with features that help you do your job efficiently and in control of your operational safety - without compromising on your comfort or mobility.



HUSQVARNA SMARTGUARD™ HELMET PE 10 H

A robust and lightweight helmet with a special chin guard aiming to increase protection of the operator's face. Complete with visor, hearing protection and room for an anti-dust mask and personal eye protection.



HUSQVARNA SMARTGUARD™ JACKET PE 10 J

The SmartGuard™ jacket is made with reinforced material aiming to increase protection of the operator's neck and chest. The jacket offers comfortable movement, high visibility according to EN20471 class 2. Removable sleeves, smart pockets and ventilation. Sizes S-XXL



HUSQVARNA WT 10 MP

Pressurised water tank, superb when there's no water supply. Pump a few times for required work pressure. Hose included for connecting to the machine's wet cutting kit. Holds 10 litres.



HUSQVARNA RA 10

Cutting attachment for the K 1260 Rail, 5.3 kg.



HUSQVARNA PIPE CLAMP KIT

For use with Husqvarna K 970 Ring and Chain and K 7000 Ring and Chain. A convenient accessory for producing straight, precise cuts in concrete and iron pipes.



HUSQVARNA K 3000/K 4000 VAC ATTACHMENT

Ideal dust collection enables you to cut without water. Fits K 3000 Wet/Vac and K 4000.



HUSQVARNA SMARTGUARD™ **BLADE COVER**

Reduces the risk of severe injury from kickbacks and emphasises correct technique by guiding the user to the cutting zone.



CUP WHEELS FOR ANGLE/HAND GRINDERS



G HUSQVARNA ELITE-GRIND T-REX SUPER/0

Hard, fast-grinding cup wheels for aggressive removal of floor coating. For use in the initial stage. Two versions depending the type of surface. The shape allows better edge reach and better pressure distribution.



G HUSQVARNA ELITE-GRIND STAR M/H

A complete series of fast-grinding cup wheels. Offers high removal rate and long life.



S HUSQVARNA VARI-GRIND ARROW

Medium-hard cup wheels with arrowshaped segments specially designed for optimal removal of coating in shorter time



RESIN TOOLS FOR ANGLE/HAND GRINDERS

G HUSQVARNA ELITE-POLISH EP EDGE D

Designed to reduce the active surface increasing the pressure on the floor with higher performance to achieve maximum gloss in fewer steps. Universal Velcro attachment



S HUSQVARNA VARI-POLISH VP EDGE W/D

A series of resin-bonded tools for handheld polishing of concrete, terrazzo and marble. Velcro attachment



S HUSQVARNA VARI-GRIND

Providing efficient grinding in all materials. Diameters 100–180 mm in four versions depending on the application.



B HUSQVARNA TACTI-GRIND

A series of entry-level cup wheel developed for less intensive use. Offers good performance-cost balance.



G HUSQVARNA ELITE-GRIND TRANSITION

Cup wheel with ceramic bond and turbo segments, designed to reduce scratches before the first polishing stage.



B HUSQVARNA TACTI-POLISH TF EDGE D

Entry level tool for handheld polishing in wide variety of grit sizes, designed with flexible backing to easily follow surface irregularities. The VELCRO® Brand attachment ensures universal compatibility.

 $\mathbf{D} = Dry$ $\mathbf{W} = Wet$

DIAMOND BLADES FOR ANGLE/HAND GRINDERS



G HUSQVARNA ELITE-CUT

Blades providing maximum cutting speed and life. Diameters 115–230 mm in six versions depending on the application.



S HUSOVARNA VARI-CUT

Blades with high cutting speed and wear resistance in all materials. Diameters 115–230 mm in nine versions depending on the application.



B HUSQVARNA TACTI-CUT

Optimised for less intensive professional cutting in most materials. Diameters 115–230 mm in six versions depending on the application.

ANGLE/HAND GRINDERS



BATTERY-POWERED HUSQVARNA HG 125 B

1500 W equivalent, grinding width 125 mm, discspeed 11000 rpm, 2.2kg (excl. battery). Compatible with Bosch Professional 18 V tools and chargers.



FLECTRIC-POWERED

HUSQVARNA BGV 125 AV

 $1300\,\mathrm{W},$ speed $11000\,\mathrm{rpm},$ grinding width $125\,\mathrm{mm},\,3.2\,\mathrm{kg}$



HUSQVARNA BHG 125 G125 2200 W, speed 4300–7200 rpm, grinding width 125 mm, 4.7 kg



HUSQVARNA BHG 125 G5

2200~W, speed~4500-9500~rpm, grinding width 125~mm, 5.8~kg



HUSOVARNA BGV 180 AVO

 $2600\,\text{W}, \text{speed}\,6600\,\text{rpm}, \text{grinding width}\,180\,\text{mm}, 5.4\,\text{kg}$



HUSOVARNA BHG 180 G180

2200 W, speed 3500–5800 rpm, grinding width 180 mm, 5 kg



HUSOVARNA BHG 180 G7

2200 W, speed 3200-6500 rpm, grinding width 180 mm, 5.7 kg

TILE AND MASONRY SAWS



HUSQVARNA TS 400 F

1500/2200 W, max \varnothing 400 mm, max cutting depth 125/230 mm, $96\,\mathrm{kg}.$



HUSQVARNA TS 350 E 1500/2200 W, max Ø 350 mm, max cutting depth 100 mm, 92 kg.



HUSQVARNA TS 300 E 2200 W, max Ø 300 (350) mm, max cutting depth 80 (100) mm, 82 kg.



HUSQVARNA TS 73 R 1000 W, max Ø 230 mm, max

cutting depth 50/100 mm, 47 kg.

DIAMOND BLADES



G HUSQVARNA ELITE-CUT

Gold level blades for fast, smooth cutting in most construction materials, at the lowest cutting cost per square metre. Diameters 300–1000 mm, in standard or silent version, depending on model and application.



ELECTRIC-POWERED HUSQVARNA TS 66 R $800\,\text{W}$, max \varnothing 200 mm, max cutting depth 40 mm, 41 kg.



ELECTRIC-POWERED HUSQVARNA TS 60 1800 W, max Ø 254 mm, max cutting depth 78/45 mm, 36 kg.



ELECTRIC-POWERED HUSQVARNA TS 100 R 2200 W, max Ø 350 mm, max cutting depth 105 mm, 106 kg.



G HUSQVARNA ELITE-CUT GS2 Specific for tiles. Available in diameters 180–350 mm.

WALL SAWS



HUSQVARNA WS 8

High frequency, wireless remote control, diamond blade 500-90 mm, $19\,kg$, cutting depth



ELECTRIC-POWERED **HUSQVARNA WS 482 HF**

High frequency, wireless remote control, diamond blade 600-1600 mm, 28 kg, cutting depth 730 mm.



ELECTRIC-POWERED **HUSQVARNA WS 440 HF**

High frequency, wireless remote control, diamond blade 600-1200 mm, 25 kg, cutting depth 530 mm.



ELECTRIC-POWEREI **HUSQVARNA WSC 40**

Attachment that converts your Husqvarna WS 482 HF and WS 440 HF from blade to chain sawing. Max cutting depth, 400 mm, 19 kg.

DIAMOND TOOLS FOR WALL SAWS



G HUSQVARNA W 1600 SERIES

Gold level blades for wall saws, with controlled distribution of the diamonds, optimising it to wall saw cutting, securing a consistent performance throughout the whole cutting and blade life, resulting in a smoother feeling for the operator. Diameters 500–2000 mm.



S HUSOVARNA W 1100 SERIES

Silver level blade for Husqvarna hydraulic and electric wall saws with an ideal design. Fits other machines as well. Diameters 600–1200 mm in three versions depending on the application.



G HUSQVARNA DIAMOND CHAINS AND GUIDE BAR

Gold level diamond chains optimised for use with WSC 40, developed for sawing in reinforced concrete and other construction materials with different hardness.

WIRE SAWS



HYDRAULIC-POWERED

HUSQVARNA CS 2512

Wire speed 20 or 25 m/s, magazine capacity 12 m (ready to use 15 m), 150 kg.



HUSQVARNA CS 10

Wire speed 24 m/s, magazine capacity 10 m, $138/135 \, kg$

DIAMOND WIRES

HUSQVARNA ELITE-WIRE, VACUUM BRAZED RANGE

Our wires for demanding applications, cutting pure steel or alloys and highly reinforced concrete. Delivers excellent performance/ life balance.



HUSQVARNA ELITE-WIRE, HYBRID RANGE

Our wires for wet cutting in medium to high reinforced concrete. Operators can optimise the cutting efficiency by choosing speed r life for the diamond wire.



HUSQVARNA VARI-WIRE,

SINTERED RANGE

Our wires for cutting medium reinforced concrete. Delivers good performance/life balance in all-round construction, demolition and refurbishing applications.



POWER PACKS



20, 30, 40 l/min, 140 bar, 10.4 kW, 145 kg.



ELECTRIC-POWERED **HUSQVARNA PP 455 E** $65\,l/min$, $230\,bar$, $25\,kW$, $139\,kg$.



NEW

ELECTRIC-POWERED **HUSQVARNA PP 8** 3-phase/1-phase 6.5 kW, 18 kg. With radio receiver for operation of WS 8.





ELECTRIC-POWERED HUSQVARNA PP 492 20 kW, 25 kg.







ELECTROHYDRAULIC-POWERED

HUSQVARNA FS 7000 DL

Diamond blade max 1500 mm, 1338 kg, cutting depth 625 mm, 55.4 kW *.



ELECTROHYDRAULIC-POWERED

HUSQVARNA FS 7000 D

Diamond blade max 1000 mm, 1032 kg, cutting depth 411 mm, 55.4 kW *



ELECTROHYDRAULIC-POWERED **HUSQVARNA FS 4800 D**

Diamond blade max 900 mm, 680-695 kg, cutting depth 381 mm, 35 kW*



HUSQVARNA FS 5000 D

Diamond blade max 900 mm, 771kg, cutting depth 374 mm,



ELECTROHYDRAULIC-POWERED HUSQVARNA FS 3500 EFI G

Diamond blade max 750 mm, 419 kg, cutting depth



HUSQVARNA FS 400 SERIES



HUSQVARNA FS 600 E/FS 500 E

Diamond blade max 600/500 mm, cutting depth 240/192 mm, 178/145 kg, 7.5 kW *



Diamond blade max 500 mm, cutting depth 189 mm, 163 kg. FS 413, petrol, 8.7 kW*. FS 410 D, diesel, 6.6 kW*



PETROL-POWERED HUSOVARNA FS 400 LV Diamond blade max 450/500 mm, cutting

depth 162/189 mm, 99 kg, 8.7 kW*.

DIAMOND BLADES FOR FLOOR SAWS

HIGH- AND MID-POWERED FLOOR SAWS



G HUSQVARNA F 1500 SERIES

Gold level blades for floor saws, delivering superior performance. Available in versions optimised for efficient cutting in cured concrete, hard concrete, and asphalt. Diameters 500-1500 mm.



G HUSQVARNA F 600 SERIES

Gold level blades for machines with motors of 25-50 kW. Diameters 300-1200 mm in four versions depending on the application.



G HUSQVARNA L 600 SERIES

Gold level blades for slot cutting and traffic loops with sandwich design. Available in two versions with 6, 8 or 10 mm segment widths. Diameters 350-450 mm.

LOW-POWERED FLOOR SAWS



G HUSOVARNA ELITE-CUT

 $\label{lem:condition} \textbf{Gold level blades with Exo-Grit segments for smooth, efficient cuts}$ also in heavily reinforced concrete. Diameters 300–600 mm in several versions optimised for the material to be cut.



S HUSQVARNA VARI-CUT


Silver level blades with high cutting speed and wear resistance. Diameters 300-500 mm in three versions depending on the application.



B HUSQVARNA TACTI-CUT

Bronze level blades optimised for less intensive professional cutting in most materials. Diameters 300-400 mm in three versions depending on the application.

^{*} As rated by the engine manufacturer.

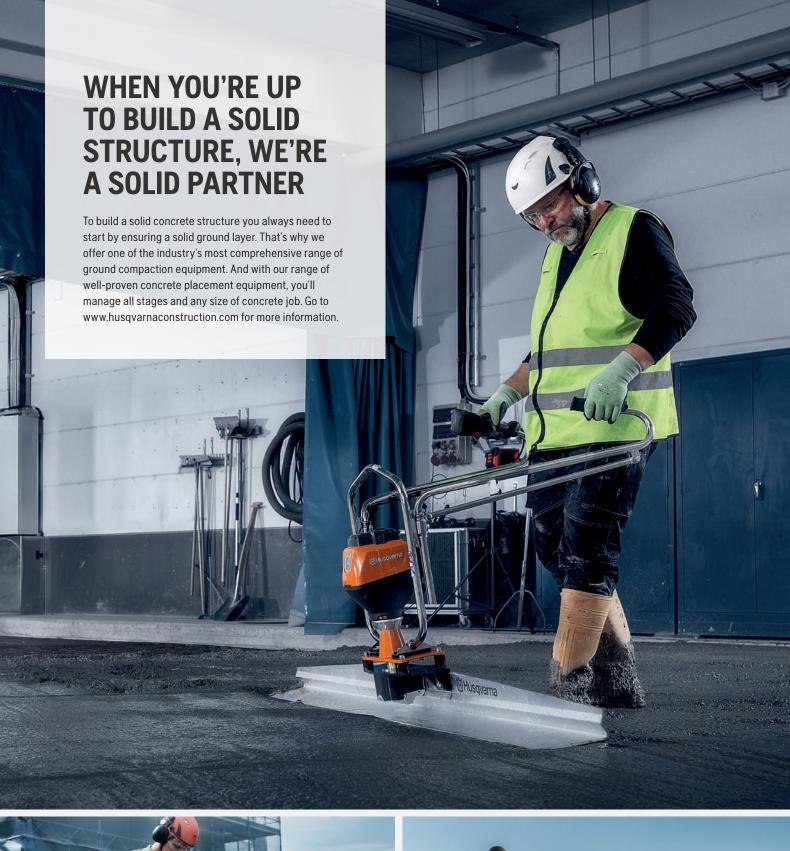





COMPACTION EQUIPMENT



HUSQVARNA LT 8005 3kW, 92-93kg



HUSQVARNA LT 6005 2.7 kW, 69-70 kg.



HUSQVARNA LT 5005 2.7 kW, 61–62 kg.



FORWARD PLATE COMPACTOR LF 60i LAT

1,2kW, 350 mm, 69kg. Ideal for hardscaping work. Includes water tank, transport wheels and low-vibration handle. Optional block paving kit available



FORWARD PLATE COMPACTOR
HUSQVARNA LFe 60 LAT

1.8kW, 350 mm, 88kg. Runs on Honda eGX battery platform, specifically developed for compaction applications.



PETROL-POWERED HUSQVARNA LX 90 3.6 kW, 450 mm, 96 kg.



HUSQVARNA LF 50 L 2.3kW, 320 mm, 53 kg.



PETROL-POWERED HUSQVARNA LF 80 L 3.6 kW, 420 mm, 84 kg.



PETROL-POWERED HUSQVARNA LFV 60 2,4 kW, 350 mm, 64 kg,



PETROL-POWERED HUSQVARNA LFV 80 3,6 kW, 420 mm, 80 kg.



PETROL-POWERED
HUSQVARNA LFV 100
3,6 kW, 500 mm, 91/101kg (petrol/diesel).



PETROL-POWERED HUSQVARNA LF 60 LAT 2.3 kW, 350 mm, 67 kg.



PETROL-POWERED HUSQVARNA LF 75 LAT 3.6 kW, 420-500 mm, 95-97 kg.



PETROL-POWERED HUSQVARNA LF 80 LAT 3.6 kW, 420 mm, 95 kg.



DIESEL-/PETROL-POWERED HUSQVARNA LF 100 LAT 2.5-3.6 kW, 500 mm, 109-118 kg.



HUSQVARNA LF 130 LT 2.5-3.6 kW, 500 mm, 135-142 kg.



DIESEL-POWERED HUSQVARNA LH 700 11kW, 780kg.



DIESEL-POWERED HUSQVARNA LH 804 11kW, 820kg.



HUSQVARNA LG 164 3.1-3.6 kW, 148-185 kg.



DIESEL-/PETROL-POWERED HUSQVARNA LG 204 3.1–4.1kW, 211–251kg.



HUSQVARNA LG 300 4.7–5.3 kW, 265–307 kg.



DIESEL-/PETROL-POWERED HUSQVARNA LG 400 6.2-8.3 kW, 398-436 kg.



HUSQVARNA LG 504 9.2kW, 470-513kg.



DIESEL-POWERED
HUSQVARNA LP 9505
18kW, drum width 850mm, 1680kg.



DIESEL-POWERED
HUSQVARNA LP 7505
7.9kW, drum width 750mm, 981–1001kg.



DIESEL-POWERED
HUSQVARNA LP 6505
7.2 kW, drum width 650 mm, 745-765 kg.

HIGH FREQUENCY ELECTRIC VIBRATORS



ELECTRIC-POWERED HUSQVARNA SMART VIBRATORS 1-phase, Ø 40−65 mm, hose length 5, 8.10 m, 13.1–18.5 kg. ELECTRIC-POWERED HUSQVARNA SMART-E VIBRATORS 1-phase, Ø40-56 mm,

hose length 0.5 m, 12-14.8 kg.



HUSQVARNA AX VIBRATORS 42V-3-200 Hz, Ø 36-65 mm, hose length 5, 8, 10 m, 12-18 kg.



ELECTRIC-POWERED
HUSQVARNA VIBRASTAR
42V-3-200Hz, Ø40-60mm, hose length 5 m,
8.4-15 kg.

POWER UNITS FOR AX/VIBRASTAR



ELECTRIC-POWERED HUSQVARNA CF 67T Output 42 V-3-200 Hz, 4.7 kVA, 67A, 70 kg, 4 outlets. WHusqvarna FIECTRIC-POWERED

HUSQVARNA CF 25 Output 42 V-3-200 Hz, 1.8 kVA, 25A, 31 kg, 2 outlets.



HUSQVARNA CF 11Output 42 V-3-200 Hz, 0.8 kVA, 11A, 18 kg, 1 outlet.

MODULAR FLEX-SHAFT VIBRATORS



ELECTRIC-POWERED HUSQVARNA AME 1600 1-phase, 1.6 kW, 6.1 kg.



HUSQVARNA AME 600 1-phase, 0.6 kW, 1.9 kg.



HUSQVARNA SUPERFLEX SERIES Flexible shafts 1/2/3/4 m, 2.4–7.3 kg.



HUSQVARNA AT SERIES Vibrator heads. Ø 29–59 mm, 1.3–3.9 kg.



EXTERNAL VIBRATORS

ELECTRIC-/PNEUMATIC-POWERED HUSQVARNA VIBRATORS
7 versions, Speed 3000–6000 rpm, max. centrifugal force 1400–16000 N.

MECHANICAL VIBRATORS



HUSQVARNA AMG 3200
Drive unit for AA and AZ vibrators.
2.8kW, 15 kg.



HUSQVARNA AA SERIES Hose length 6/4.8 m, 4 diameters: 39–75 mm.



HUSQVARNA AZ SERIES Hose length 6/4.8 m, 4 diameters: 25–55 mm.

PNEUMATIC VIBRATORS



HUSQVARNA AY SERIES
7 diameters, 26–155 mm, hose length 2 or 4 m,
4–28 kg.



HUSQVARNA BV 30i Output power 0.8 kW, weight 11.5 kg. BLi 36 V battery system.



PETROL-POWERED HUSQVARNA BV 30 1kW, centrifugal clutch, 14 kg.



HUSQVARNA BV 30 SCREED BLADE 1.8/2.4/3.0/3.6/4.2m



2.0 m, 7.0 mg.





HUSQVARNA BE 20 0.45 kW, 37 kg.



HUSQVARNA BD 32/42/52/62 3.2, 4.2, 5.2, 6.2 m, 32–57 kg.

MODULAR SCREEDS



ELECTRIC-POWERED HUSQVARNA BT 90 E 3kW, 20 m, 96 kg.



PETROL-POWERED HUSQVARNA BT 90 G 5kW, 20 m, 93kg.



HUSQVARNA BT 90 G/E SCREED SECTION 0.5/0.75/1/2/3 m.



HUSQVARNA BT 90 CROWN INVERT BRACKET

267 mm, maximum angle 15°.

RIDE-ON TROWELS AND POWER TROWELS



PETROL-POWERED

HUSQVARNA CRT 48 PS

Ideal for finishing surfaces 1000 –2300 m². The power steering enables accurate manoeuvring and virtually fatigue-free operation with two control modes to accommodate operator preference in varying site conditions. 42,5kW, 2×1220 mm, 660 kg.



PETROL-POWERED

HUSQVARNA CRT 48

Ideal for finishing surfaces 1000–1900 m². Featuring a superior mechanical steering system and balanced power-to-weight ratio. 27.6 kW, 2×1220 mm, 579 kg.



PETROL-POWERED

HUSQVARNA CRT 36

Ideal for finishing surfaces 250–1000 m². Featuring a superior mechanical steering system and balanced power-to-weight ratio. 16.5 kW, 2×915 mm, 451 kg.



PETROL-POWERED HUSQVARNA CT 48 5.9-8,7 kW, 1180 mm, 105-125 kg.



PETROL-POWERED HUSQVARNA CT 36 3.6-5.9kW, 875 mm, 85-94 kg.



HUSQVARNA BG 475 6.3 kW, 1140 mm, 105 kg.

1.5 kW, 600 mm, 60 kg.



PETROL-POWERED HUSQVARNA BG 375 3.6-6.3kW, 900 mm, 88-102 kg.



PETROL-POWERED HUSQVARNA BG 245 2.5 kW, 600 mm, 58 kg.



HUSQVARNA BG COMBI 1.8-2.4kW, 1020-850 mm, 88-86 kg.



TOOLS RIDE-ON TROWELS AND POWER TROWELS




HUSQVARNA HIPERTROWEL™ FLOOR POLISHING SYSTEM

Polish large concrete floors fast with a ride-on power trowel and Hiperflex TRW tool pads mounted on flexible Hipertrowel™ gyro drivers.



G HUSQVARNA PROLINE



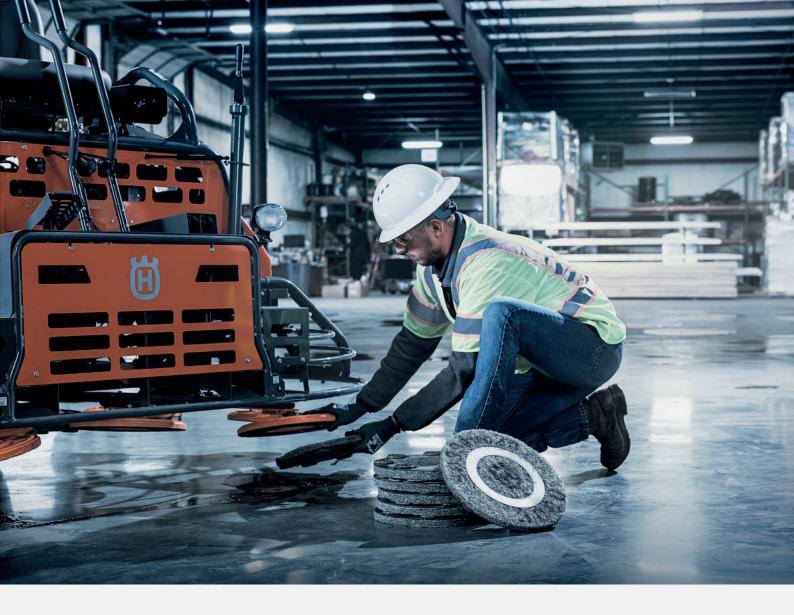


PETROL-POWERED
HUSQVARNA SOFF-CUT 2000

Diamond blade max 250 mm, cutting depth max 38 mm, 144kg, 6.5 kW*.

EARLY ENTRY SAWS



Diamond blade max 350 mm, cutting depth max 70 mm, 191kg, 14.9kW*.



DIAMOND BLADES FOR EARLY ENTRY SAWS



G HUSQVARNA SOFF-CUT BLADES

Patented gold level blades, supplied with skid plate. They are developed and tested for aggregate conditions. Soff-Cut blades are top quality and are designed specifically for the Soff-Cut system. Diameters 150–350 mm in three different series.





FLOOR SCRAPERS AND TOOLS



HUSQVARNA BMS 220ADB Ride-on, 4kW battery powered, 48V, 1142 kg.



ELECTRIC-POWERED HUSQVARNA BMS 150 Ride-on, 2.2 kW, 230V/16 A, 480 kg.



ELECTRIC-POWERED HUSQVARNA BS 110 1.5 kW, 230V/16 A, 170 kg.



ELECTRIC-POWERED HUSQVARNA BS 75 1.5 kW, 230V/16 A, 128 kg.



HUSQVARNA SCRAPER TOOLS Flat- and self scoring blades and blade holders. Husqvarna offers several optional blades for each different floor scraper and application.

FLOOR SCARIFIERS AND TOOLS



HUSQVARNA BMP 4000RCRemote controlled. 30 kW, 400V/63 A, 400 mm working width, 1550 kg.



PETROL-POWERED
HUSQVARNA BMP 265PETROL
6kW, Petrol, 265 mm working width,
190 kg.













HUSQVARNA SCARIFYING TOOLS

A gold level range of scarifying drums with different steel and carbide wheels that cover applications from coating removal to grooving.

FLOOR SHAVERS AND TOOLS



ELECTRIC-POWERED
HUSQVARNA BMP 4000RC
Remote controlled. 30 kW, 400V/63 A, 380 mm
working width, 1550 kg.



ELECTRIC-POWERED
HUSQVARNA BMC 335RC
Remote controlled. 16kW, 400V/63A, 335 mm working width, 432kg.



ELECTRIC-POWERED HUSQVARNA BMC 335
16kW, 400 V/32-63 A, 335 mm working width, 430 kg.



HUSQVARNA SHAVING TOOLSWe offer different shaving blades for each individual machine and application.



HUSQVARNA SHOT BLASTERS AND STEEL BLASTERS

We supply a large range of shot blasting equipment. All our shot blasting machines are characterised by their manoeuvrability, precision and versatility. With all our shot blasters you are able to work in a close to dust-free environment when they are connected to an appropriate dust extractor.

HUSQVARNA SHOT BLASTERS





ELECTRIC-POWERED
HUSQVARNA BLASTRAC 2-20DT
2×11 kW, 400 V, 63 A, working speed
0.5-33 m/min, working width 550 mm, 575 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC 1-10DS
11kW, 400V, 32/63A, working speed
0.5-25 m/min, working width 254 mm, 395 kg.



HUSQVARNA BLASTRAC 1-10DPS75
7.5kW, 400V, 16 A, working speed
0.5-30 m/min, working width 254 mm, 211 kg.



HUSQVARNA BLASTRAC 1-8DPS55 5.5kW, 400V, 16A, working speed 0.5–23 m/min, working width 203 mm, 154 kg.



0.5-25 m/min, working width 380 mm, 450 kg.

HUSQVARNA BLASTRAC 1-8DPF40 4kW, 400V, 16A, working speed 0.5-23 m/min, working width 203 mm, 122 kg



ELECTRIC-POWERED
HUSQVARNA BLASTRAC 1-8DPS30
3kW, 230/400 V, 16A, working speed
0.5-23 m/min, working width 203 mm, 125 kg.

HORISONTAL STEEL BLASTERS



HUSQVARNA BLASTRAC EBE 500 $(50/60\,\text{Hz})\,22\,\text{kW},400\,\text{V},63\,\text{A},$ working speed 1–15 m/min, working width $500\,mm,\,742\,kg.$



HYDRAULIC-POWERED **HUSQVARNA BLASTRAC EBE 500S** (50/60Hz) 22kW, 400V, 63A, working speed 1–30 m/min, working width



HUSQVARNA BLASTRAC EBE 350EX 11 kW, 400 V, 32 A, working speed $1\text{--}15\,\text{m/min},$ working width $350\,\text{mm},\,450\,\text{kg}.$

VERTICAL STEEL BLASTERS



HUSQVARNA BLASTRAC EBE 350 11 kW, 400 V, 32 A, working speed 1–15 m/min, working width 350 mm, 430 kg.



HYDRAULIC-POWERED
HUSQVARNA BLASTRAC EBE 350S 11kW, 400 V, 32 A, working speed 1–30 m/min, working width 350 mm, 415 kg.



HUSQVARNA BLASTRAC EBE 900V 2×22 kW, 400 V, 125 A, working speed 0.5-10 m/min, working width 890 mm, 880 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC EBE 200V 7.5 kW, 400 V, 32 A, working speed 0.2-20 m/min, working width 217 mm, 177 kg.

DUST COLLECTORS





ELECTRIC-POWERED
HUSQVARNA BLASTRAC DC 2-48 18 kW, 400 V, 32 A, 1107 kg.



ELECTRIC-POWERED
HUSQVARNA BLASTRAC DC 200 13kW, 400 V, 30 A, 0 360 kg.



ELECTRIC-POWERED **HUSQVARNA BLASTRAC DC 975** 7.5 kW, 400 V, 63 A, 510 kg.



ELECTRIC-POWERED HUSQVARNA BLASTRAC DC 655 6.6 kW, 400 V, 63 A, 481 kg.



ELECTRIC-POWERED **HUSQVARNA BLASTRAC DC 350EX** 5.5 kW, 400 V, 63 A, 665 kg.

BLASTRAC MAGNETIC BROOM



HUSQVARNA MAGNETIC BROOM R900



HUSQVARNA MAGNETIC BROOM R600



HUSQVARNA MAGNETIC SWEEPER

ABRASIVES



HUSQVARNA ABRASIVES S330, S390, S460, S550, S660

PLANETARY GRINDERS



ELECTRIC-POWERED

HUSQVARNA BMG 2200

63 kW, 400V, 125 A, grinding width 2200 mm, grinding dicsc 3x3, 3035 kg



ELECTRIC-POWERED
HUSQVARNA HTC 950 RX
15 kW, 380-415, 440-480 V, 3-phase,
grinding width 920 mm, grinding disc
4×270 mm, 600 kg.



HUSQVARNA PG 830 RC 16.5 kW, 380-415 V, 3-phase, grinding width 800 mm, grinding disc 3×270 mm, 598 kg.



ELECTRIC-POWERED
HUSQVARNA PG 830
16.5 kW, 380-415 V, 3-phase, grinding width 800 mm, grinding disc 3×270 mm, 556 kg.



ELECTRIC-POWERED
HUSQVARNA PG 830 S
11kW, 380-415 V, 3-phase, grinding width
800 mm, grinding disc 3×270 mm, 497 kg.



ELECTRIC-POWERED
HUSQVARNA HTC X8 / HTC RX8
12/15 kW, 380/415 V, 3-phase, grinding width
800mm, grinding disc 3×270/4×270 mm,
499/574 kg.



ELECTRIC-POWERED
HUSQVARNA BMG 780 / BMG 780RC
15 kW, 400 V, 32 A/63A, 3-phase, grinding width 780 mm, weight 487/639 kg.



ELECTRIC-POWERED
HUSQVARNA PG 690 RC
12.5kW, 380-415 V, 3-phase, grinding width
640 mm, grinding disc 3×270 mm, 598 kg.



HUSQVARNA PG 690 12.5 kW, 380-415 V, 3-phase, grinding width 640 mm, grinding disc 3×270 mm, 502 kg.



ELECTRIC-POWERED
HUSQVARNA HTC X6 / HTC RX6
75 kW, 380/415 V, 3-phase, grinding width
600mm, grinding disc 3×230/4×230mm,
384/441 kg.



ELECTRIC-POWERED
HUSQVARNA BMG 555
7.5kW, 400 V, 16A, grinding width 555 mm, 298kq.



ELECTRIC-POWERED
HUSQVARNA HTC 5
4.0/2.2kW, 400/220V, 3-phase/1-phase, grinding width 515mm, grinding disc 3×230mm, 122/179kg.



ELECTRIC-POWERED
HUSQVARNA PG 540
4.0/2.2kW, 400/220V, 3-phase/1-phase
grinding width 515 mm, grinding disc
3×230 mm, 178/169kg.



HUSQVARNA PG 510 4.0/2.2kW, 400/220 V, 3-phase/1-phase, grinding width 515 mm, grinding disc 3×230 mm, 133/120 kg.



HUSQVARNA PG 450 2.2kW, 230V, 1-phase, grinding width 450 mm, grinding disc 3×180 mm, 109 kg.



ELECTRIC-POWERED
HUSQVARNA BMG 444SC
2.2 kW, 230 V 16 A, grinding width 444 mm,
132/135 kg. Fixed speed/speed control.

SINGLE DISC GRINDERS



ELECTRIC-POWERED
HUSQVARNA PG 400
4 kW, 400 V, 3-phase, grinding width
400 mm, 115 kg.



PETROL-POWERED
HUSQVARNA PG 400 PETROL
Grinding width 400 mm, 140 kg.



ELECTRIC-POWERED
HUSQVARNA PG 280
3/2.2 kW, 400/220 V, 3-phase/1-phase, grinding width 280 mm, 70 kg.



ELECTRIC-POWERED HUSQVARNA HTC 270 EG 2.2kW, 230 V, 1-phase, grinding width 270 mm, 103 kg.



ELECTRIC-POWERED HUSQVARNA BG 250 5.5kW, 400 V, 3-phase, grinding width 250 mm, 146 kg.

METAL TOOLS FOR REMOVAL AND GRINDING



G S HUSQVARNA EZ T-REX®

EZchange™ tool system with PCD segments for aggressive removal of various types of coatings resulting in a clean surface with efficiency and precision.



VARI-GRIND EZ SL

diamond tool specifically developed for efficient initial grinding of wood. Part of the EZchange™ tool system



Developed for creating a bush-

hammered surface or to expose

large aggregates.

G HUSQVARNA ELITE-GRIND EZ-SERIES

EZchange™ tool system consisting of of six different tool types to efficiently grind and prepare concrete floors of varying hardness. Achieve smooth and exposed surfaces with a consistent scratch pattern.



G HUSQVARNA ELITE-GRIND SGW

Metal honded tool with cross attachment system specifically designed to smoothly wet grind natural stone floors. Part of the EZchange™ tool system



S HUSQVARNA VARI-GRIND EZ-SERIES

EZchange™ tool system of concrete grinding tools ideally for users looking for best price/performance criteria. Available in three bonds and three grit sizes.



The wood series is a single layer



B HUSOVARNA TACTI-GRIND EZ-SERIES

EZchange™ tools system for concrete grinding where cost is the first criteria of selection. Available in one bond with three grit sizes.



range is designed to maximize productivity while minimizing downtime. The tool holders are engineered to support the tools and make the tool change process hassle-free.



G S B HUSQVARNA GRINDING DISCS

250 mm/10" bolt-on grinding discs for high removal application. designed for Husqvarna BGS/BG 250.



DUST EXTRACTORS

HUSQVARNA T10000 11 kW, 380-415 V, 32 A, 900 m³/h, 336 kg.

H



HUSQVARNA T7500 5.5 kW, 380-415 V, 16 A, 600 m³/h, 206 kg.



HUSQVARNA HTC D80 7.5 kW, 230-400 V, 16.7 A, 700 m³/h, 272 kg



HUSQVARNA HTC D60 5.5 kW, 230-480 V, 15 A, 530 m³/h, 179 kg

RESIN TOOLS FOR POLISHING



ELITE-POLISH ET D

For efficient removal of scratches and safer transition when shifting from metal to resin bonded tools. EZchange™ attachment system



G HUSQVARNA

ELITE-POLISH EP D

This high-performing concrete

types of concrete, EZchange™

polishing tools series performs on all

G HUSQVARNA

ELITE-POLISH EX D Top-of-the line tools for dry grinding and polishing of natural stone surfaces. EZchange™ attachment system.



S HUSOVARNA VARI-POLISH VT W/D

Serves as the ideal starting point when the surface is too rough to begin directly with polishing tools. Available for wet or dry applications, Universal VELCRO® brand attachment.



G HUSQVARNA ELITE-POLISH EF W/D

Premium resin technology with optimised flexible design to achieve a high result of polishing and gloss. EZchange™ attachment system

S HUSQVARNA



concrete floors. Fits both auto scrubbers

and grinding machines. Velcro® or

EZchange™ attachment system.

G HUSQVARNA ELITE-POLISH EO D Diamond impregnated maintenance pads, ideal for cleaning polished

A high-performance, resin-bonded transitional tool for cementitious overlavs. Universal VELCRO® attachment for use on any machine.



S HUSOVARNA

VARI-POLISH VP W/D Resin bond polishing pads can be chosen for high-end polishing. Grit range from 50 to 3000. Universal VELCRO® brand attachment. of problems.



S VARI-POLISH VC D

Diamond-infused triangular pads of corners leaving no untouched areas. Universal VELCRO® brand



VARI-POLISH VF D

Optimal for polishing of concrete and entitious toppings such as overlays or screed. It's the hest troubleshooting product for all kinds



designed for precision edge grinding attachment for use on any machine



S HUSQVARNA VARI-POLISH VS D

Specially designed for sanding when restoring wooden floors. Universal VELCRO® brand attachment for use on any machine. Use together with Husqvarna Foamflex pads, for use on any machine.



B HUSQVARNA TACTI-POLISH TP D

Entry-level polishing pucks, for stress-free polishing, in a wide range of grit sizes. Universal VELCRO®



B HUSQVARNA TACTI-POLISH TT W

Polishing pucks optimal for transition process. Suitable for wet application . Universal VELCRO® brand

SURFACE TEST EQUIPMENT

 $\mathbf{D} = Drv$ $\mathbf{W} = Wet$

FLOOR TREATMENT PRODUCTS



For pore filling of pin-holes and micro cracks in concrete

FLOOR

51/101. Topical Guard 201.

Topical Guard Color LG 20

Topical Guard Color DG 201.





PROTECTION SYSTEM For protecting the surface against stains: Premium Guard WB 51/101, Premium Guard SB



Protect 51.

ICRI PROFILE **CONCRETE SET** A set of 10 different real concrete samples corresponding with CSP to the globally accepted ICRI maintenance: Clean &



A portable fully-automatic instrument to test slip resistance of floors. Measures both SCOF and DCOF in both wet and dry



ROUGHNESS TESTER A mobile surface roughness tester. Measures 31 parameters, for example Ra R₇ Rmax

ICRI PROFILE

PLASTIC CHIPSET

the ICRI specifications.

A chipset with 10 different

with CSP 1-10 according to



HUSQVARNA RHOPOINT IQ - GLOSS AND DOI METER A powerful mobile surface quality tester. Measures Gloss, DOI and HAZE,

HUSOVARNA MOHS

TEST KIT - SURFACE

HARDNESS TESTER

determine the hardness of

the concrete or any hard

floor in relation to Mohs scale.

A scratch test kit to



HUSOVARNA MG6-SS GLOSS CHECKER A portable gloss meter specifically developed for stone. Measuring Angle 60°.



KARSTEN PIPE TEST KIT A water penetration test kit used as a rapid testing procedure of water penetration in building materials.



FLECTRIC-POWERED HUSQVARNA DE 120 H PACE 480m3/s, 41kg



HUSQVARNA DE 110i H Weight 26 kg. Husqvarna BLi 36 V battery svstem.



ELECTRIC-POWERED
HUSOVARNA DE 110 H 1.1 kW. 220-240 V. 5 A. 240 m³/h, 25 ka

H

HUSQVARNA DE 110 SH 0.9 kW, 220-240 V, 4 A, 215 m³/h, 25 kg



HUSQVARNA S11 1.2 kW, 220-230 V, 16 kg



HUSQVARNA C 5500 76 mm, 100 l, 67 kg.



HUSQVARNA C 3000 63 mm, 37 l, 22 kg.

SLURRY VACUUMS

ELECTRIC-POWERED
HUSQVARNA DE 120 H

2.2 kW. 220-240 V. 15 A.

480 m³/h, 39 kg



HUSOVARNA W 70 P 1.2 kW. 220-230 V. 8 A. $200 \, m^3/h$, $44 \, kg$.



ELECTRIC-POWERED
HUSOVARNA W 70 1.2kW. 220-230V. 5 A. 200 m³/h, 34 kg.



1.2 kW. 220-230 V. 7 A. 160 m³/h, 27 kg.



AIR CLEANERS

ELECTRIC-POWERED HUSQVARNA A 2000 0.75 kW, 220-230 V, 3.3 A, 38 kg.



HUSOVARNA A 1000 0.285 kW. 220-230 V.